
8 7 6 5 4 3 2

PRODUCT: PR - XX - XX - AX5 ORDER DESC.: OBXX - OAXX - AX5XXXX

PR1600 SERIES - MILD STEEL ROLLER WITH MALE THREADED AXLE - GREASED BEARINGS

MEASUREMENT

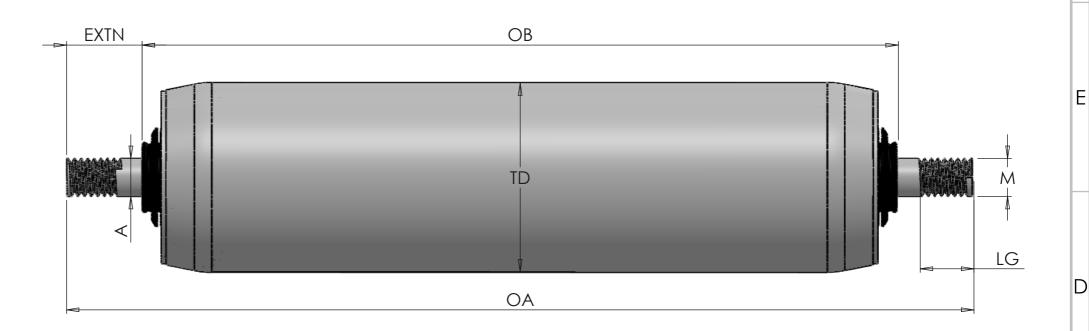

BELOW ARE TUBE DIAMETER OPTIONS, PLEASE SELECT AXLE FROM THE SAME ROW

TD	TUBE DIAMETER & THICKNESS	ROUND AXLE (A)	
		Ø	Ø
50	50 x 1.5	10	12
50MD	51 x 2.0	10	12
50HD	51 x 3.0	10	12
60	60 x 2.0	10	12
60HD	60 x 3.0	-	-
63	63.5 x 3.0	16	20
70MD	70 X 2.0	-	-
703	70 x 3.0	-	-
803	80 x 3.0	20	-

PART CODE BREAKDOWN

TD = TUBE DIAMETER
A = AXLE DIA
OB = OVER BEARING
OA = OVER AXLE

AX5 = MALE THREADED AXLE

M = THREAD SIZE (SAME AS AXLE Ø)

LG = THREAD LENGTH

AXLE SUPPLIED LOOSE UNLESS

STATED OTHERWISE

GENERATE ORDER CODE BELOW

QTY:

TD A M LG
PR-___- AX5 OB___OA__AX5____

						COPYRIGHT RESERVED		REVISION:	1	l
	unit 3, Albioi moor street brierley hill, west mids, england, dy5 3sz		AED Rollers Best rollers Best service			PR160	O SE	ERIES		
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS		DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING FINISH: BZP	PR-ORD	ER-A	X5	А3		
		NAME	REVISION	DATE	MATERIAL: MILD STEEL					
\perp	DRAWN	K JEAVONS	1	12/01/2024	WEIGHT:	SCALE:1:2	SHEET	1 OF 1		